

BODET Scorepad



User manual - Mini basketball

For software version V1.1B01



www.bodet-sport.com

BODET SA
BP30001
49340 Trémentines | FRANCE
Tel: +33 (0)2 41 71 72 98
Fax: +33 (0)2 41 71 72 01



Ref.: 607996 A

Ensure on delivery that the product has not been damaged in transport.

1. Mini basketball

1) Select




2) Select a configuration from the list:


MINI BASKETBALL U8-U9 1




MINI BASKETBALL U8-U9 2


Configurations identified by  can only be edited with the club access code. The club Access code is "1234". It can be changed in the "Club access" menu.

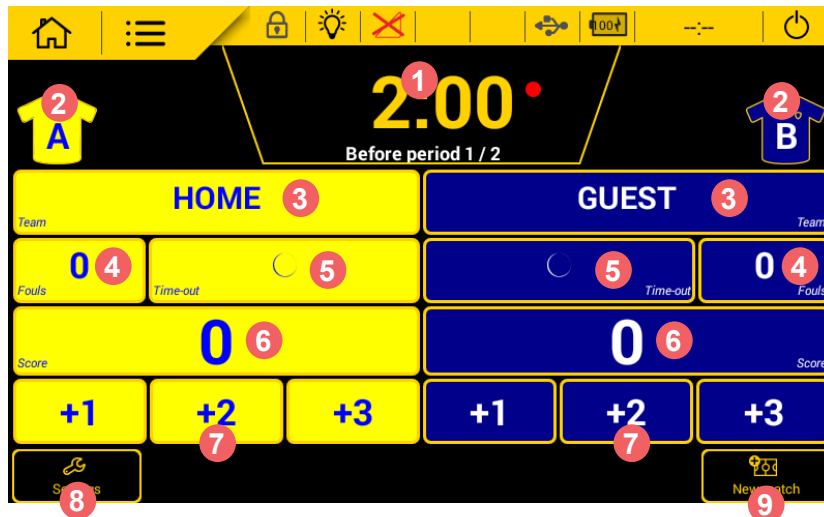

3) Screen in MINI BASKETBALL U8-U9 1 match mode:



Pressing a game setting brings up a new window in which you can:

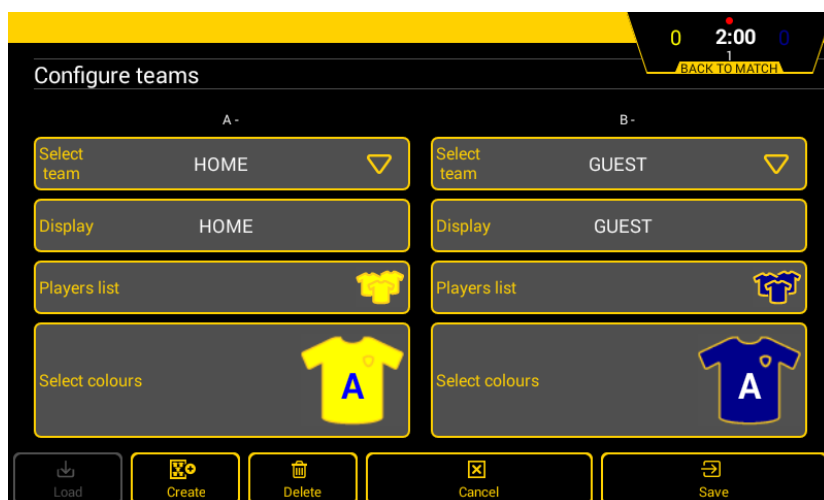- 1 edit the length of each period. The buzzer can be triggered at each end of period and the timer reset.
- 2 edit colour of team shirts and game markings. Standard colours are provided plus a palette to select each team's colours.
- 3 edit the name of the team. After pressing LOCALS or VISITORS, press  **Config. team** to edit the configuration of the teams (edit team screen name, activate players, choice of colours, load a team, create a new team or delete a team):



- 4 assign a team foul. A correction function lets you edit the number of fouls.
- 5 call a time-out. To start the countdown, press the **START**  button. Add or delete a time-out by pressing **Correct** .
- 6 add or delete a point from the team score.
- 7 add 1, 2 or 3 points.
- 8 edit the configuration settings (see next page for the list of settings).
- 9 start a new match. **Caution: the match in progress will be lost.**

> ENTERING CONFIGURATION SETTINGS

1) Click  to edit a configuration.

Note: All these settings are accessible from the  **Advanced Settings** menu.

The list of editable settings is given below:

Headings	Settings	Default values	Description	Standard settings
Match				
	Pre-period number	2	Function enabled using the ON/OFF button 1 to 9 periods in steps of 1	√
	Pre-period time	2:00	1 to 90 minutes in blocks of 1 0 to 59 seconds in steps of 1	√
	Period number	6	1 to 9 periods in steps of 1	√
	Period time	4:00	1 to 90 minutes in steps of 1 1 to 59 seconds in steps of 1	√
	End of period buzzer	3s	Function enabled using the ON/OFF button 1 to 5 seconds in steps of 1	-
Extra time				
	Extra time number	9	Function enabled using the ON/OFF button 1 to 9 periods in steps of 1	-
	Extra time duration	4:00	1 to 90 minutes in steps of 1 0 to 59 seconds in steps of 1	-
	Time-out	2:00	Function enabled using the ON/OFF button 0 to 90 minutes in steps of 1 0 to 59 seconds in steps of 1	-
Time-out				
	Half time duration	OFF	Function enabled using the ON/OFF button 0 to 90 minutes in steps of 1 0 to 59 seconds in steps of 1	-
	Inter-period timer	OFF	Function enabled using the ON/OFF button 0 to 90 minutes in steps of 1 0 to 59 seconds in steps of 1	-
	Time-out buzzer	OFF	Buzzer duration to call a time-out Function enabled using the ON/OFF button 1 to 300 seconds in steps of 1 Buzzer can be triggered for end of time-out	√
	Time before overtime	2:00	0 to 10 minutes in steps of 1 0 to 59 seconds in steps of 1	-
Points and fouls				
	Total team fouls	Period 3	Option to reset fouls for each period or at half-time. Accumulated fouls can be set from 1 to 9 with the option of switching OFF.	√
Time-outs				
	Number of time-out markers	1 + half-time reset	Toggle time-out marker display per period or half-time Display 1 to 6 markers	-
	Long T-O	60	Function enabled using the ON/OFF button 1 to 120 seconds in steps of 1	√
	Buzzer	OFF OFF	Buzzer duration to call the end of a time-out Function enabled using the ON/OFF button 1 to 20 seconds in steps of 1 Buzzer can be triggered for end of time-out	√
Miscellaneous				
	Maintain result	20	1 to 99 seconds in steps of 1	-
HDMI				
	Load image	ON	Enabling wallpaper image (if OFF = wallpaper black)	-
Function keys				
	Alpha message	OFF	Function enabled using the ON/OFF button	-
	Next period	OFF	Function enabled using the ON/OFF button	-