

BODET Scorepad



User Manual - Basketball 3x3



www.bodet-sport.com


BODET SA
1 rue du Général de Gaulle
49340 Trémentines | France
Tel: +33 (0)2 41 71 72 99
Fax: +33 (0)2 41 71 72 01



Ref.: 608296 A

Ensure on delivery that the product has not been damaged in transport.


1. Basketball 3x3

1) Select  on the home screen.

2) Select a configuration from the list:


BASKET 3x3 National (Number period: 1 - Time period: 10:00 - 1/10 seconds: OFF) 

BASKET 3x3 1 (Number period: 1 - Time period: 10:00 - 1/10 seconds: OFF)


Configurations identified by  can only be edited with the club code.


The club Access code is “1234”. It can be changed in the “Club access” menu.

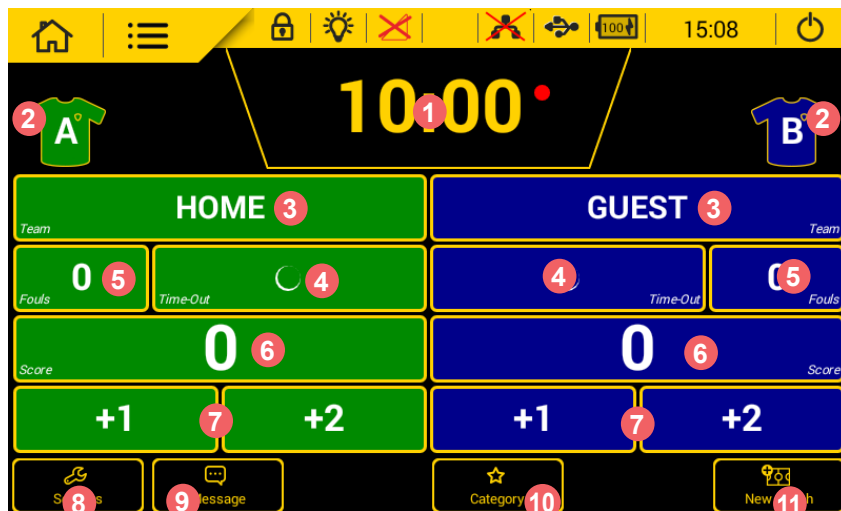

3) Screen in BASKET 3x3 National match mode:



Pressing a game setting brings up a new window in which you can:

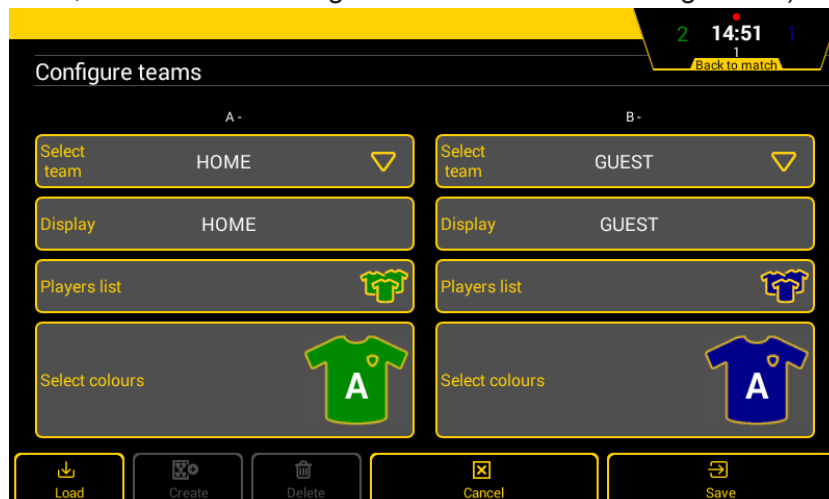- 1 edit the length : duration of each period. The buzzer can be triggered at each end of period and the timer reset.
- 2 edit colour of team shirts and game markings. A standard colour scheme is provided as well as a palette to set your own colour.
- 3 edit the name of the team. After pressing HOME or VISITORS, press  **Team config**, to edit the configuration of both teams (switch teams, edit team screen name, activate players, choice of colours, load configuration, create a new configuration or delete this configuration):



- 4 call a time-out. To start the countdown, press the **START**  button. Add or delete a time-out by pressing **Correction** .
- 5 add or delete a foul.
- 6 add or delete a point
- 7 add 1 or 2 points.
- 8 edit the configuration settings (see next page for the list of settings).
- 9 add and then start a scrolling message.
- 10 indicate the name of the competition.
- 11 start a new match. **Warning: the match in progress will be lost.**

> ENTERING CONFIGURATION SETTINGS

1) Click  to edit a configuration.

Note : All these settings are accessible from the  **Advanced Settings** menu.

The list of editable settings is given below:

Headings	Settings	Default values	Description	Standard settings
Match				
	Period time	10:00	0 to 90 minutes in steps of 1 1 to 59 seconds in steps of 1	√
	End of period buzzer	5 s	Function enabled using the ON/OFF button 1 to 5 seconds in steps of 1	√
Possession				
	Possession time	12s	Function enabled using the ON/OFF button 1 to 90 seconds in steps of 1	√
	Buzzer	2s	Function enabled using the ON/OFF button 1 to 3 seconds in steps of 1	√
	Stop automatic chrono	OFF	Function enabled using the ON/OFF button	√
	Display keyboard	ON	Function enabled using the ON/OFF button	√
Points and fouls				
	Point max	21	1 to 50 points in steps of 1	√
	Bonus 1	7	Function enabled using the ON/OFF button 0 to 20 bonus in steps of 1	√
	Bonus 2	10	Function enabled using the ON/OFF button 0 to 20 bonus in steps of 1	√
Time-out				
	Plot T-O	60s Nb:1	Function enabled using the ON/OFF button 1 to 3 plots of time-out Duration of the time-out: 0 to 2 minutes 1 to 59 seconds in steps of 1	√
	Buzzer T-O	10s OFF OFF	Activation of the pre-end horn with the ON/OFF key 1 to 20 seconds in steps of 1 Activation of the end horn with the ON/OFF key Activation of the start horn with the ON/OFF key	√
HDMI				
	HDMI display	...	Selecting the HDMI screen	√
	Logo partner	OFF	Function enabled using the ON/OFF button	√
	Load image	ON	Function enabled using the ON/OFF button	√
	Logo teams	...	Choice of HDMI background	√
Keys				
	Alpha message	ON	Function enabled using the ON/OFF button	√
	Category	ON	Function enabled using the ON/OFF button	√