

BODET Scorepad



User manual - Taekwondo



www.bodet-sport.com


BODET SA
1 rue du Général de Gaulle
49340 Trémentines | France
Tél: +33 (0)2 41 71 72 99
Fax: +33 (0)2 41 71 72 01




Réf.: 608351A


Ensure on delivery that the product has not been damaged in transport.


1. Taekwondo


1) Select  on the home screen.


2) Select a configuration from the list :


TAEKWONDO YOUNGS 1 (Round duration: 0:30 Round number: 3 Tatami Sound: 1) 

TAEKWONDO YOUNGS 2 (Round duration: 1:00 Round number: 3 Tatami Sound: 1) 

TAEKWONDO YOUNGS 3 (Round duration: 1:30 Round number: 3 Tatami Sound: 1) 


TAEKWONDO WOMENS (Round duration: 2:00 Round number: 2 Tatami Sound: 1) 

TAEKWONDO NATIONAL (Round duration: 2:00 Round number: 3 Tatami Sound: 1) 


Configurations identified by  can only be edited with the club code.

The club Access code is “1234”. It can be changed in the “Club access” menu.

3) Screen in TAEKWONDO NATIONAL:

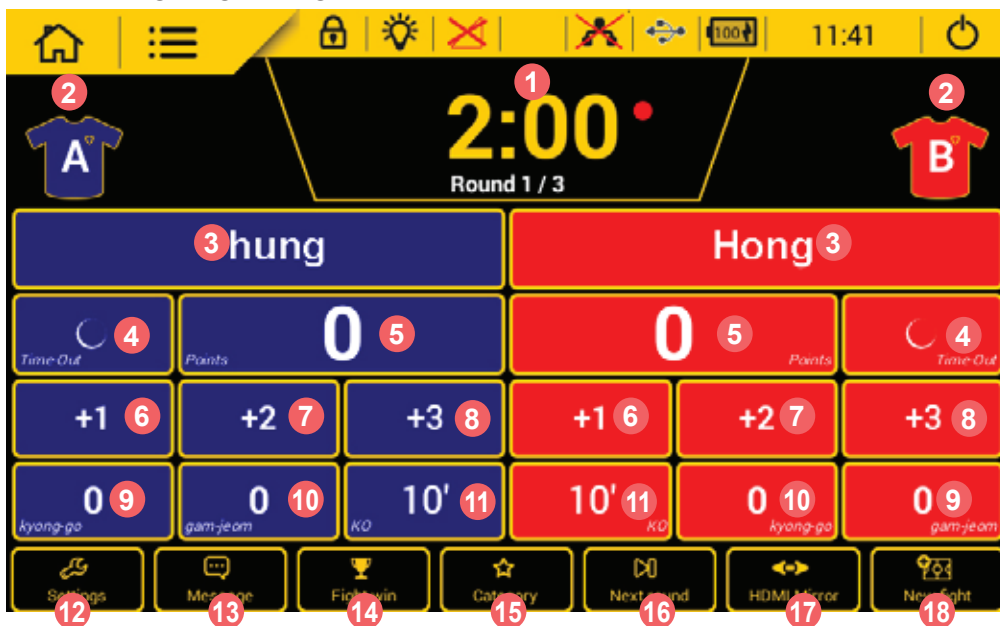

Pressing a game setting brings up a new window in which you can:

- 1 edit the length : duration of fight.
- 2 edit colour of team shirts and game markings. A standard colour scheme is provided as well as a palette to set your own colour.
- 3 edit the name of the team. After pressing HOME or GUEST, press  **Team config**. to edit the configuration of both teams (switch teams, edit team screen name, activate players, choice of colours, load configuration, create a new configuration or delete this configuration):



- 4 add a time out.
- 5 add or subtract one point to a competitor.
- 6 add one point to a competitor.
- 7 add two points to a competitor.
- 8 add three points to a competitor.
- 9 add or subtract one kyong-go.
- 10 add or subtract one gam-jeam.
- 11 start the 10 seconds countdown before calling a KO.
- 12 edit the configuration settings (see next page for the list of settings).
- 13 launch a message on the display medium.
- 14 selection of the competitor who won the fight.
- 15 manually enter the tournament name and category.
- 16 go to the next round.
- 17 reversal of the Hong - Chong display.
- 18 start a new match. **Warning: the match in progress will be lost.**

2. Entering configuration settings

1) Click  **Settings** to edit a configuration.

The list of editable settings is given below:

Headings	Settings	Default values	Description
Fight			
	Round number	3	1 to 9 round in step of 1
	Round duration	2:00	0 to 9 minutes in step of 1 1 to 59 seconds in step of 1
	Round mode	DOWN	Count up (UP) or countdown (Down).
	End round horn	3s	Function enabled using the ON/OFF button 1 to 5 seconds in step of 1
	Tatami Sound	1	1 to 12 sounds with test button
Overtime			
	Kumane	ON	ON/OFF
	Overtime duration	2:00	0 to 9 minutes in step of 1 1 to 59 seconds in step of 1
	Overtime mode	UP	Count up (UP) or countdown (Down).
Points and penalties			
	Kyong-Go	kyong-go	Function enabled using the ON/OFF button. 1 to 9 kyong-go in step of 1 (possibility to rename) Possibilité to activate automatically this penalty.
	Gam-Jeom	gam-jeo...	Function enabled using the ON/OFF button. 1 to 9 gam-jeom in step of 1 (possibility to rename) Possibilité to activate automatically this penalty.
	Penalty reset	ON	ON/OFF.
	Game Point Difference	12	Function enabled using the ON/OFF button. 1 to 20 points in step of 1
Time-out			
	Horn TO	3s	Function enabled using the ON/OFF button.
		OFF	0 to 20 seconds in step of 1
		OFF	Horn at end: function enabled using the ON/OFF button. Horn at start: function enabled using the ON/OFF button.
	Duration TO	1:00	Function enabled using the ON/OFF button. 0 or 1 minute 0 to 59 seconds in step of 1
	KO Duration	10s	1 to 30 seconds in step of 1
	KO Horn	ON	ON/OFF.
Various			
	Maintain result	3s	Function enabled using the ON/OFF button. 1 to 90 secondes in step of 1
HDMI			
	HDMI display	...	Select the HDMI display
	Sponsor logo	OFF	Select the display of partners' logos
	Wallpaper	...	Select a colour or an image for the HDMI display default background
	Logos teams	ON	Function enabled using the ON/OFF button.